


SAFETY POWER SUPPLY

TYPE Z - * - ZI*/*ET

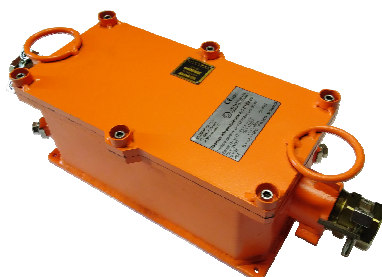

Dimensions 150 x 300 x 133mm

Safety power supply type Z - * - ZI*/*ET is intended for supplying intrinsically safe circuits with rated voltage $U_n = 5V, 12V, 15V$ i $24V$ DC. The power supply was built in a flameproof enclosure providing IP54 protection. The PSU has been adapted for supply from the AC mains network with the rated voltage $24V, 42V, 133V, 231V/50Hz$. It can be used in fields (rooms) that are not at risk of coal dust and / or methane explosion and in potentially explosive areas.

The power supply meets the conditions of the device group I category M2.

Certificate UE **CBiDGP 15 ATEX 006X**



I M2 Ex d [ia] I Mb

Z - * - ZI*/*ET

Z - *	ZI	*/	*	ET
Dimensions 3 - 150 x 300 x 133mm; 4 - 200 x 200 x 137mm; 5 - 250 x 250 x 141mm	Safety power supply	Rated output voltage 12 - $U_n = 12V$; 15 - $U_n = 15V$; 24: $U_n = 24VDC - 2\%$ $U_o = 24V$	Maximum output current I_o : 2 - $I_o = 2A$ 3 - $I_o = 3A$ 07 - $I_o = 0,7A$	business „ELTECH”

Connectors	1 - 11	1 - 12	1 - 14	1 - 15	1 - 16	1 - 12	1 - 17	1 - 13
Rated supply voltage U_n	24V /50Hz	42V /50Hz	100V /50Hz	110V /50Hz	127V /50Hz	133V /50Hz	220V /50Hz	231V /50Hz

e-mail: eltech@eltechnet.pl
POLAND